Elite VWH

Premier Hot Water Supply Boiler

10 : 1

Turndown Ratio

Up to

98%

Energy Star Rated

Gas Fired

Volume Water Heater





www.htproducts.com

ENERGY STAR

Advanced Heating
& Hot Water Systems

HTP

A BRAND OF ARISTON THERMO USA


Elite VWH

Premier **Hot Water Supply Boiler**




Top 10 Features

Advanced modulating 10 to 1 turndown ratio	Up to 98% efficient
Durable 316L stainless steel heat exchanger	Vents in inexpensive PVC pipe, up to 200 equivalent feet
Available in LP or Natural Gas	Eco-friendly and low NOx combustion system
Total System Control interface: a 2-line 20-character LCD	Impressive range: 4 models, ranging from 220,000 to 399,000 Btuh
Floor standing or wall mount	Cascade up to 8 units

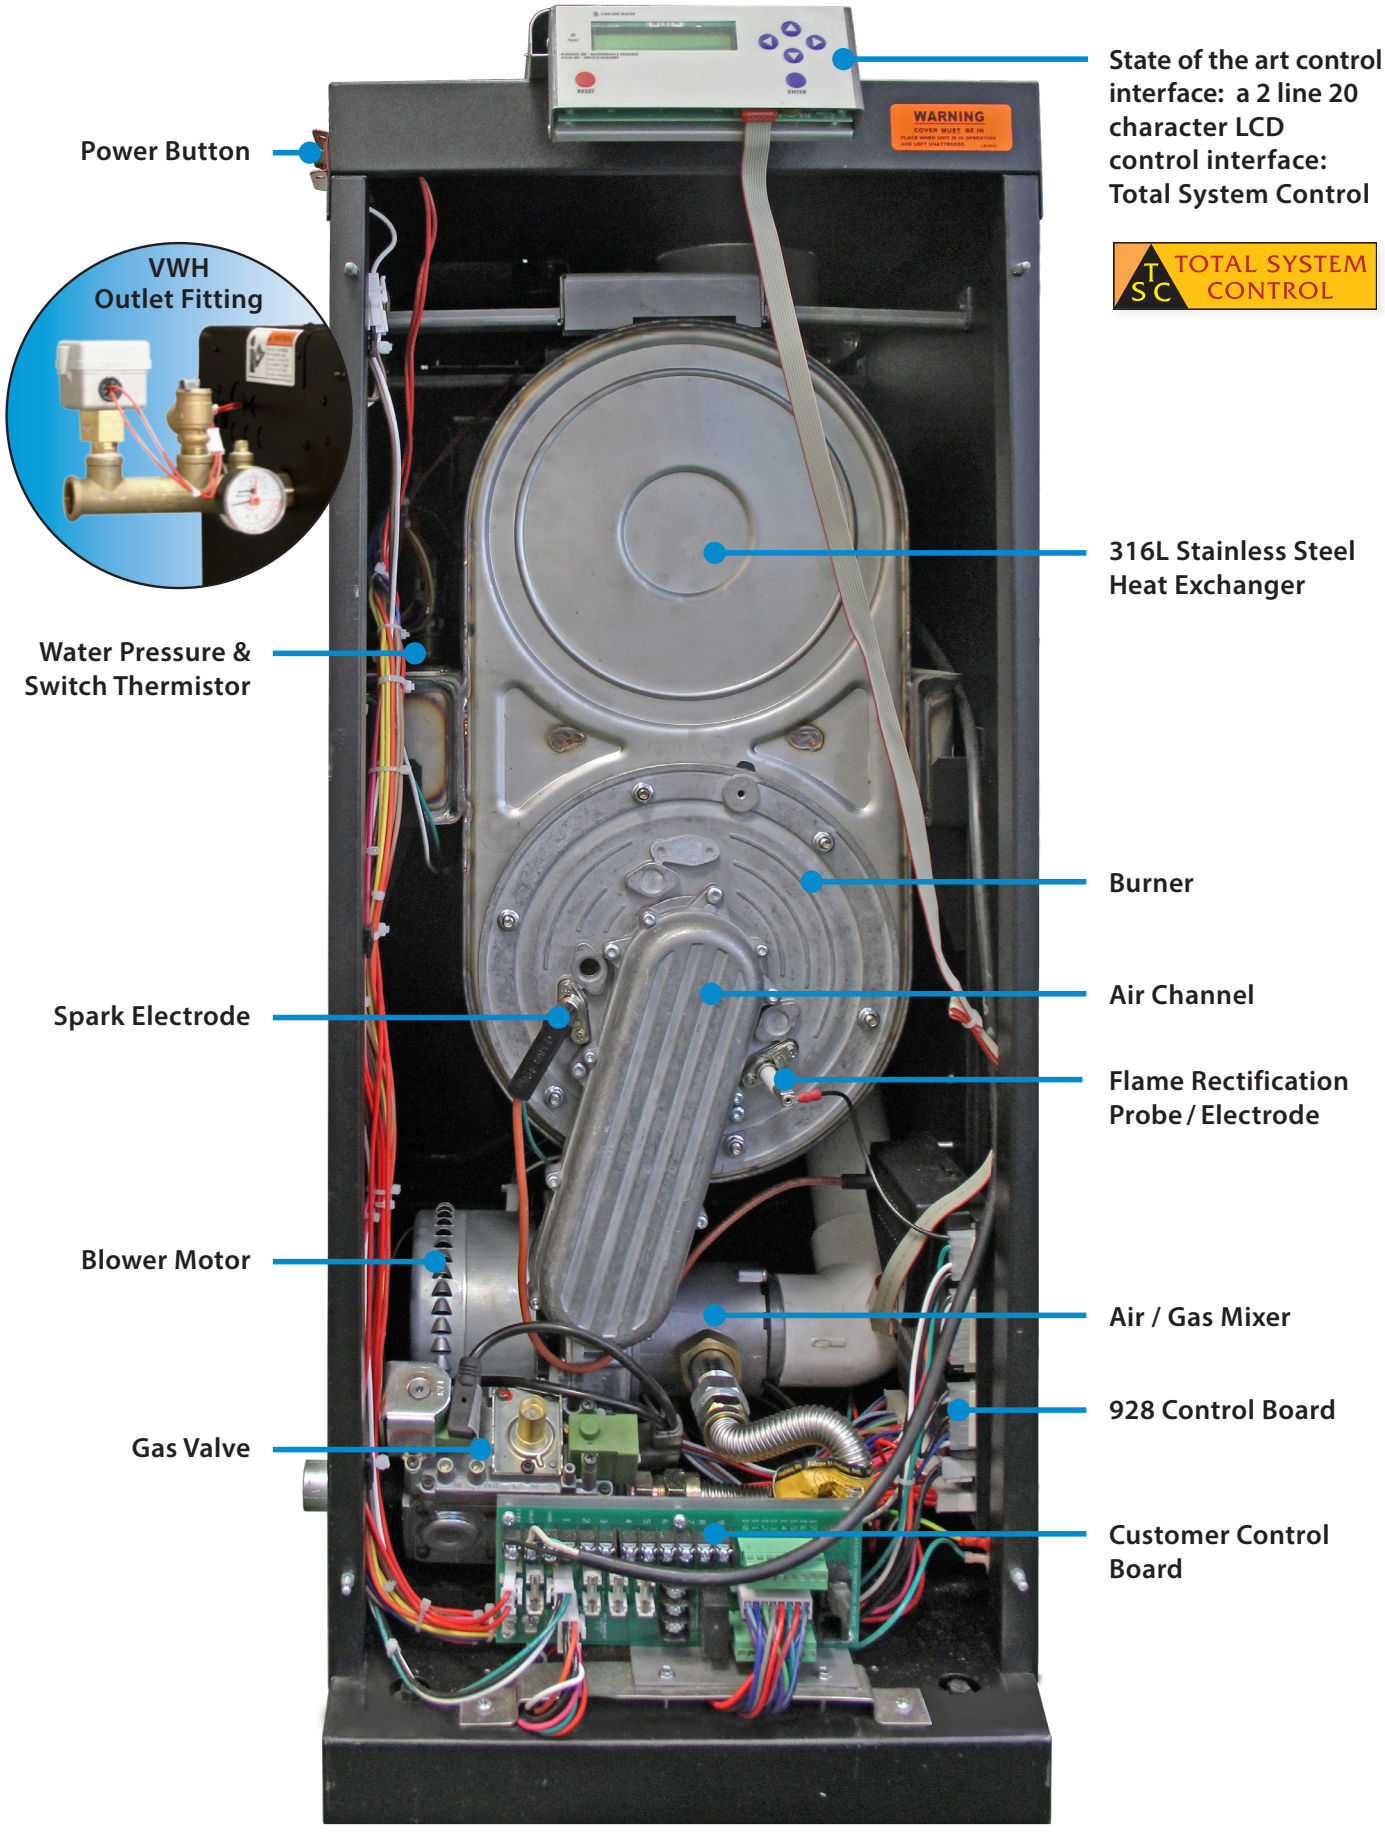
Power Button
VWH
Outlet Fitting
Water Pressure &
Switch Thermistor
Spark Electrode
Blower Motor
Gas Valve
State of the art control interface: a 2 line 20 character LCD control interface: Total System Control
TOTAL SYSTEM CONTROL
316L Stainless Steel Heat Exchanger
Burner
Air Channel
Flame Rectification Probe / Electrode
Air / Gas Mixer
928 Control Board
Customer Control Board
WARNING

Elite VWH
Premier Hot Water Supply Boiler


1. EXHAUST VENT CONNECTION
2. COMBUSTION AIR INLET CONNECTION
3. ELECTRICAL CONNECTIONS
4. SYSTEM RETURN
5. SYSTEM SUPPLY with INTEGRATED RELIEF VALVE
6. CONDENSATE CONNECTION
7. GAS LINE CONNECTION
8. DISPLAY/CONTROL PANEL
9. AIR RELEASE VENT

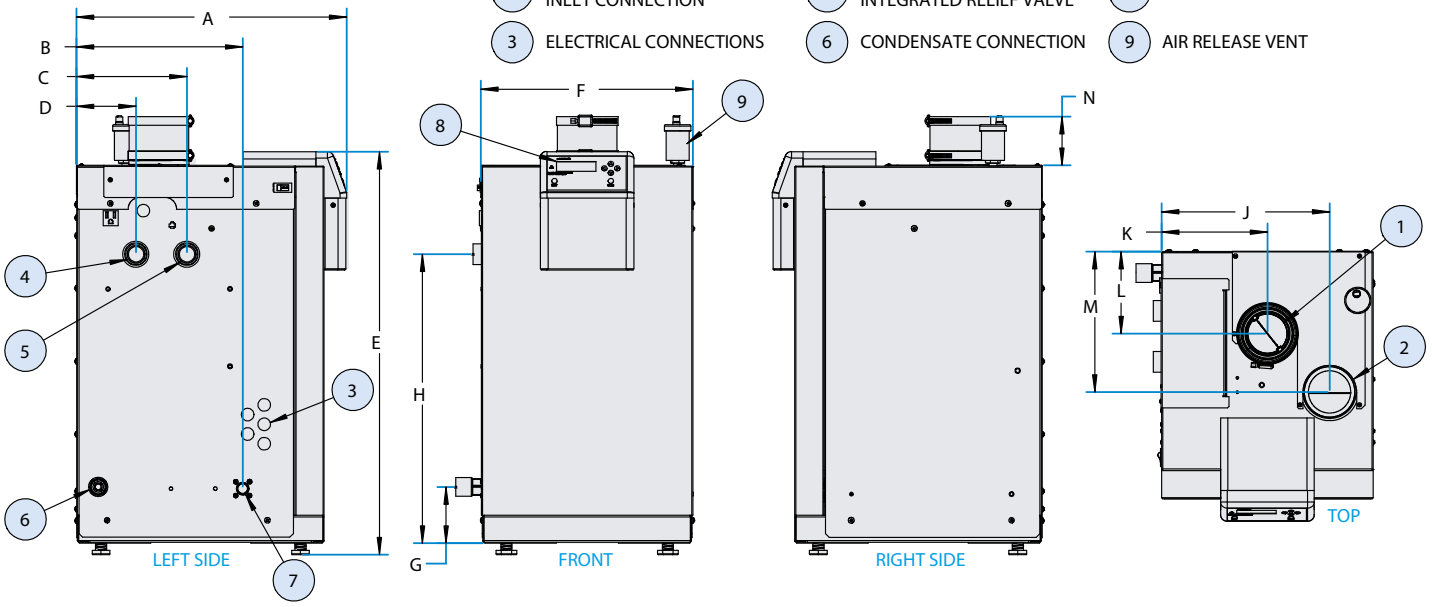

MODEL*	A	B	C	D	E	F	G	H	J	K	L	M	N	Shipping Weight	Energy Star	GPS @ 100°F Rise
EP-220VWH	26.5″	19.5″	15.50″	6.00″	24.25″	14.5″	4.5″	20″	11.75″	7.38″	4.25″	8.25″	4″	164 lbs	95%	254

*"N" DENOTES NATURAL GAS
"LP" DENOTES PROPANE
ALL DIMENSIONS ARE APPROXIMATE AND ARE SUBJECT TO CHANGE

1. EXHAUST VENT CONNECTION
2. COMBUSTION AIR INLET CONNECTION
3. ELECTRICAL CONNECTIONS
4. SYSTEM RETURN
5. SYSTEM SUPPLY
6. RELIEF VALVE
7. CONDENSATE CONNECTION
8. GAS LINE CONNECTION
9. DISPLAY/CONTROL PANEL

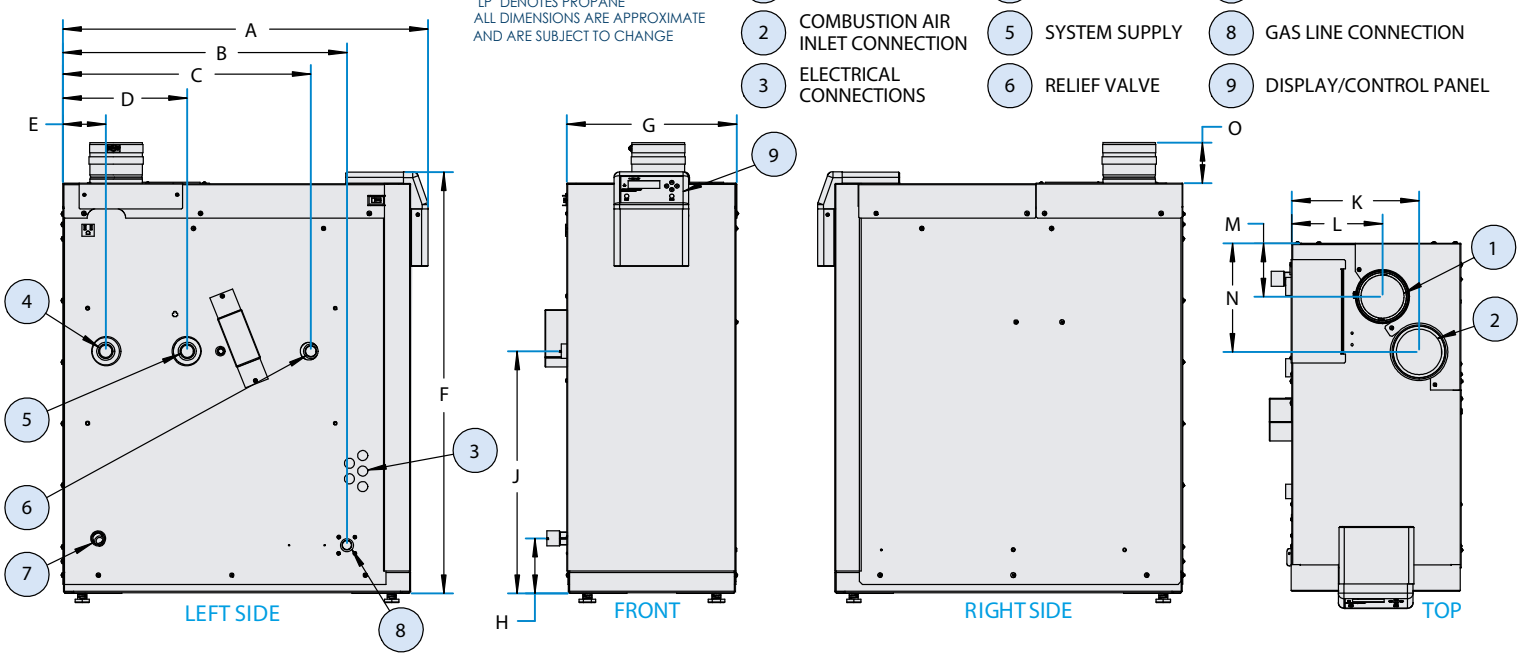

MODEL*	A	B	C	D	E	F	G	H	J	K	L	M	N	O	Shipping Weight	Energy Star	GPS @ 100°F Rise
EP-299VWH	24.75″	17.5″	14.5″	7.38″	3.25″	36.5″	14.5″	4.75″	21″	11″	7.88″	4.63″	9.25″	3.5″	211 lbs	96%	347
EP-301VWH	24.75″	17.5″	14.5″	7.38″	3.25″	36.5″	14.5″	4.75″	21″	11″	7.88″	4.63″	9.25″	3.5″	211 lbs	95%	347
EP-399VWH	31.75″	24.75″	21.5″	10.75″	3.75″	36.5″	14.5″	4.75″	21″	11″	7.88″	4.63″	9.25″	3.5″	256 lbs	98%	461

WHAT'S IN THE BOX

- Temperature & Pressure Gauge
- Pressure Relief Valve
- Intake PVC Tee with Screens
- Exhaust PVC Coupling with Screens
- Outlet Combination Fitting
- Flow Switch and Paddles
- Installation Manual
- Warranty

TOTAL SYSTEM CONTROL

Heat Exchanger Bears the ASME "H" Stamp

AHRI CERTIFIED www.ahridirectory.org Globally Recognized. Industry Respected.

ENERGY STAR

LEAD FREE



 © Ariston Thermo USA LLC.
In accordance with our company policy of ongoing product improvement, Ariston Thermo USA LLC. reserves the right to make changes without prior notice. • All weights in this brochure are approximate.